

DV+ 70i VT-S


Tandem roller with vibrating roller drum and set of tyres
Tandem rollers Series DV+ / Series H277









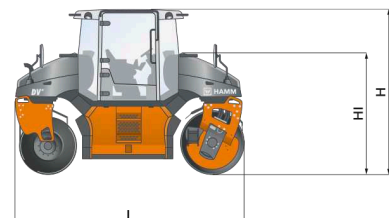



HIGHLIGHTS DV+

- > Operating concept Easy Drive
- > Electronic machine management Hammtronic
- > Large panorama cabin with clear view concept and free visibility of the drums and the construction site
- > High compaction quality through optimum setting of the compaction parameters
- > Intelligent water sprinkler system

Machine dimensions		
Total length (L)	mm	4140
Width (B)	mm	1603
Total height (H)	mm	2960
Drum width (X)	mm	1500
Height loading, min. (Hl)	mm	2170



EU Stage V /
EPA Tier 4

TECHNICAL DATA		Unit	DV+ 70i VT-S
	Weights		
	Operating weight with cab	kg	7595
	Operating weight, max.	kg	10280
	Static linear load, front	kg/cm	26,2
	French classific., data/class		20,5,9,2/VX1.PLO
	Machine dimensions		
	Total length	mm	4140
	Total height with cab	mm	2960
	Height loading, min.	mm	2170
	Wheel base	mm	3000
	Total width with cab	mm	1680
	Max. working width	mm	2770
	Kerb clearance, left/right	mm	610/610
	Turning radius, inside	mm	2800
	Drum dimensions		
	Drum width, front	mm	1500
	Drum diameter, front	mm	1140
	Drum thickness, front	mm	17
	Drum type, front		Smooth/split
	Track offset, left/right	mm	1270
	Wheel dimensions		
	Size of tyres, rear		11.00-20
	Width over tyres, rear	mm	1490
	Number of tyres, rear		4
	Diesel engine		
	Manufacturer		KUBOTA
	Version		V3307-CR-T
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		55,4/75,3/2200
	Power rating SAE J1349, kW/HP/rpm		55,4/74,2/2200
	Emission standard		EU Stage V / EPA Tier 4
	Exhaust gas after-treatment		DOC-DPF
	Drive		
	Speed, infinitely variable	km/h	0-11,0
	Regulation, infinitely variable		Hamtronic
	Climbing ability, vibration on/off	%	35/40
	Vibration		
	Vibration frequency, front, I/II	Hz	42/50
	Amplitude, front, I/II	mm	0,61/0,42
	Centrifugal force, front, I/II	kN	68/67
	Steering		
	Oscillation angle +/-	°	4
	Steering, type		All-wheel, analogue
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	148
	Water tank, capacity	L	740
	Additive tank, capacity	L	30
	Sound level		
	Acoustic power LW(A), sticker		104
	Acoustic power LW(A), measured		

EQUIPMENT

12 V sockets (double), 2 large working and rear view mirrors, Foldable scraper, Operating concept Easy Drive, Pressurized refilling of water tanks from below, Pressure water sprinkling with interval switch, ECO mode, Operator's platform with entry from both sides, Frequency control, Speed-controlled water sprinkling system, Speed preselect, Cabin floor window, front and rear, Vibration-isolated operator's platform, Track offset, hydraulic, Automatic vibration system, Spray system with spray bar front and rear, Water filtering (triple), Water tank front and rear, can be filled from both sides, Central water drain, CE conformity, ROPS with protective roof, metal, Mechanical adjustment of seat-operating unit, Working lights

OPTIONAL EQUIPMENT

Heating and air conditioning, Multifunction armrest, right, foldable, Electrical adjustment of seat-operating unit, Safety belt monitoring device, Radio, HCQ Navigator, Fire extinguisher, Edge pressing and cutting equipment, Chip spreader, Thermal aprons, Anti-freeze injection system, Central grease point, Bypass filter system, HAMM Compaction Meter (HCM), Automatic engine-off function, HAMM Temperature Meter (HTM), Telematics interface, Rotating beacon, Mobile cooling box, Coming home lighting, Battery isolation switch, Water tank cover, lockable, Lamp protection grille, Additional mirror, Drum edge lighting, Drum lighting, Camera system

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

